
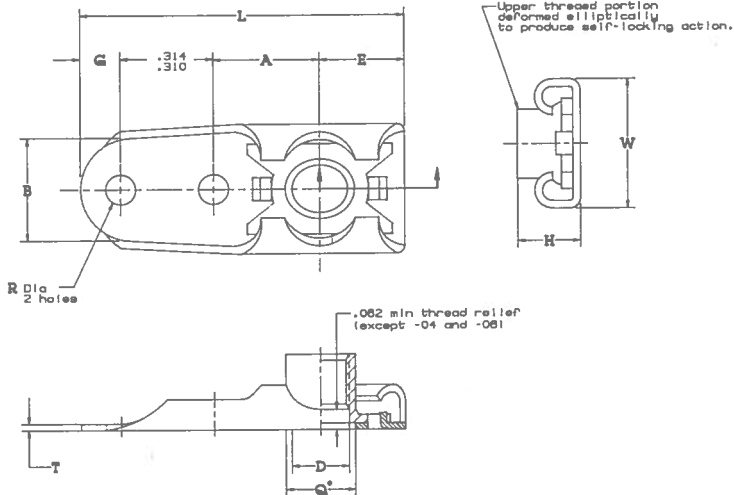




PART NUMBERS	THREAD (MIL-S-8878)	A ±.005 (REF)	B (REF)	D** (MIN)	E (REF)	G (REF)	H (MAX)	L (MAX)	Q* (REF)	R +.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS/100
F2000-04	.1120-40 UNJC-36	.344	.329	—	.275	.130	.160	1.051	.250	.068	.025	.422	.36
F2000-06	.1360-32 UNJC-36			—			.175						.38
F2000-08	.1640-32 UNJC-36			.168			.250						.50
F2000-3	.1800-32 UNJF-36	.500	.359	.194	.364	.141	.281	1.306	.312	.130			.82
F2000-4	.2500-28 UNJF-36			.254			.329	1.398	.375				1.18
F2000-5	.3125-24 UNJF-36			.317			.344	1.441	.437				1.45
F2000-6	.3750-24 UNJF-36		.422	.379	.485								

- * Hole in basket allows full float.
 ** Does not conform to NAS1032.

MATERIAL: Nut & basket - carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. QQ-P-416, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027

FLOATABILITY: -04 thru -4 = .030 radially from center, maximum; -5 and -6 = .025 radially from center, minimum.

TEMPERATURE RANGE: 450°F

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Example: F2000-3BC.
 (Refer to engineering data section for "BC" details).

APPLICATION: These anchor nuts are for use in applications to aid assembly and maintenance where manufacturing tolerances require floating anchor nuts. Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements. These anchor nuts are interchangeable with MS21081, NAS667 and NAS1032 in the applicable material and finish conditions.

F2000

**ANCHOR NUT
FLOATING, ONE-LUG**

F2000