

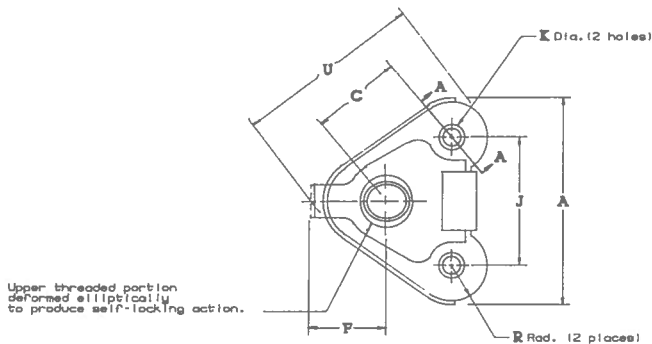





.062 min. thread relief



SECTION A-A

PART NUMBERS	THREAD (MIL-S-8879)	A (MAX)	C ±.005	F (MAX)	H (MAX)	J ±.002	K +.005 -.000	P* (MIN)	R (MAX)	T ±.005	U (MAX)
F3001-08	.1640-32 UNJC-3B	.788	.344	.268	.205	.488	.098	.240	.135	.077	.680
F3001-3	.1900-32 UNJF-3B							.238			
F3001-4	.2500-28 UNJF-3B	1.079	.500	.321	.312	.707		.298	.155	.103	1.038
F3001-5	.3125-24 UNJF-3B	1.094		.363	.325		.130	.372	.185	.103	1.058

*Holes in basket allows full float.
**Does not conform to NAS1788.

MATERIAL: Nut & basket - A286 corrosion-resistant steel.

FINISH: Nut - kaylube molybdenum disulfide dry lubricant coated.
Basket - passivated.
Use part number F3031 for silver plated per AMS2410. Temperature 800° F.
Basket may be passivated or silver plated manufacturer's option.

PROCUREMENT SPEC: MIL-N-25027.

FLOATABILITY: .025 minimum radially from center.

TEMPERATURE RANGE: 450°F.

APPLICATION: These anchor nuts are specifically designed for use in corner mounting areas where limited clearance would preclude use one lug or two lug anchor nuts.
These parts are interchangeable with NAS1788 in the applicable material and finish conditions.

F3001

ANCHOR NUT
CORNER FLOATING

F3001