


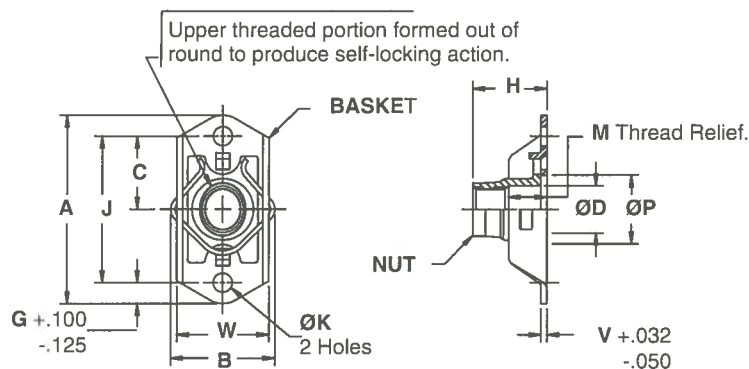

F49046N

PART NUMBER	THREAD (MIL-S-8879)	A MAX	B REF	C ±.010	D MIN	H MAX	J ±.005	K +.005 -.000	M MIN	P REF	W MIN	PUSH OUT LBS. MIN	TORQUE OUT IN-LBS. MIN	APPROX. WT. LBS/100
F49046N-3-2	.1900-32 UNJF-3B	.948	.500	.349	.194	.299	.686	.098	.125	.250	.454	200	90	.62
F49046N-3-3	.1900-32 UNJF-3B	.948	.500	.349	.194	.362	.686	.098	.188	.250	.454	200	90	.67
F49046N-3-4	.1900-32 UNJF-3B	.948	.500	.349	.194	.424	.686	.098	.250	.250	.454	200	90	.72
F49046N-3-5	.1900-32 UNJF-3B	.948	.500	.349	.194	.496	.686	.098	.313	.250	.454	200	90	.77
F49046N-3-6	.1900-32 UNJF-3B	.948	.500	.349	.194	.558	.686	.098	.375	.250	.454	200	90	.82
F49046N-4-2	.2500-28 UNJF-3B	1.292	.620	.505	.254	.341	.998	.098	.125	.312	.544	225	160	1.14
F49046N-4-3	.2500-28 UNJF-3B	1.292	.620	.505	.254	.400	.998	.098	.188	.312	.544	225	160	1.22
F49046N-4-4	.2500-28 UNJF-3B	1.292	.620	.505	.254	.466	.998	.098	.250	.312	.544	225	160	1.30
F49046N-4-5	.2500-28 UNJF-3B	1.292	.620	.505	.254	.532	.998	.098	.313	.312	.544	225	160	1.38
F49046N-4-6	.2500-28 UNJF-3B	1.292	.620	.505	.254	.595	.998	.098	.375	.312	.544	225	160	1.46
F49046N-5-2	.3125-24 UNJF-3B	1.292	.710	.505	.317	.388	.998	.130	.125	.375	.650	250	280	1.84
F49046N-5-3	.3125-24 UNJF-3B	1.292	.710	.505	.317	.449	.998	.130	.188	.375	.650	250	280	1.93
F49046N-5-4	.3125-24 UNJF-3B	1.292	.710	.505	.317	.524	.998	.130	.250	.375	.650	250	280	2.02
F49046N-5-5	.3125-24 UNJF-3B	1.292	.710	.505	.317	.586	.998	.130	.313	.375	.650	250	280	2.11
F49046N-5-6	.3125-24 UNJF-3B	1.292	.710	.505	.317	.649	.998	.130	.375	.375	.650	250	280	2.20

MATERIAL: Nut & Basket - Carbon steel per AMS 5085 (UNS G10500), or alloy steel 4130 per AMS 6370 (UNS G41300).

Clip - 302 stainless steel per AMS 5688 (UNS S30200) or ARMC 018-2MN.

FINISH: F49069-(*)-(*) - Cadmium plate per QQ-P-416, Type II, Class 2 and Kaylube molybdenum disulfide dry lubricant per MIL-L-46010.

F49069-(*)-(*)CW - Cadmium plate per QQ-P-416, Type II, Class 2 and carbowax lubricant.

F49069-(*)-(*)X - Cadmium plate per QQ-P-416, Type II, Class 2.

PERFORMANCE: MIL-N-25027, except push-out & torque-out as tabulated & reuseability of 100 cycles.

FLOATABILITY: .030-.040 radially from center.

VARIATIONS: Dimensions apply before lubrication.

F49046N

ANCHOR NUT
FLOATING, TWO-LUG

F49046N