


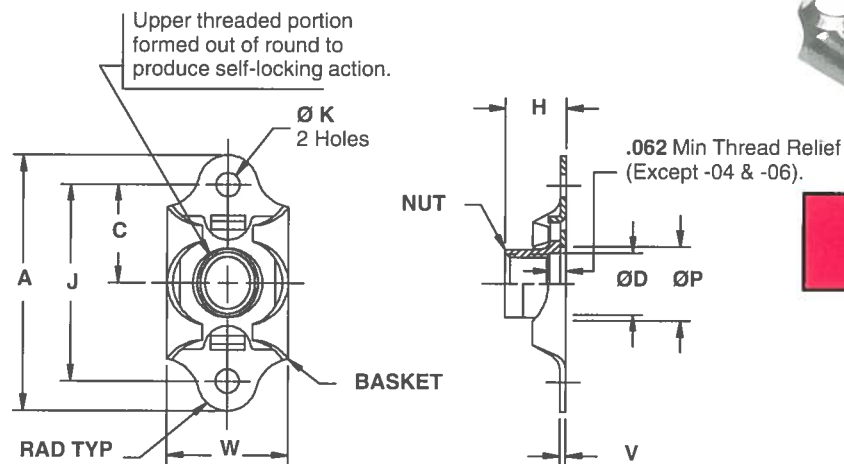

F51602

PART NUMBER	THREAD (MIL-S-8879)	A MAX	C ±.005	D MIN	H MAX	J ±.002	K +.005 -.000	P REF	V REF	W MAX	APPROX WT LBS/100
F51602-04	.1120-40 UNJC-3B	.948	.344	—	.175	.688	.098	.250	.032	.416	.31
F51602-06	.1380-32 UNJC-3B	.948	.344	—	.203	.688	.098	.250	.032	.416	.34
F51602-08	.1640-32 UNJC-3B	.948	.344	.168	.250	.688	.098	.250	.032	.416	.36
F51602-3	.1900-32 UNJF-3B	.948	.344	.194	.250	.688	.098	.250	.032	.416	.37
F51602-4	.2500-28 UNJF-3B	1.292	.500	.254	.281	1.000	.098	.312	.032	.516	.66
F51602-5	.3125-24 UNJF-3B	1.292	.500	.317	.328	1.000	.130	.375	.045	.609	1.09
F51602-6	.3750-24 UNJF-3B	1.292	.500	.379	.344	1.000	.130	.437	.055	.680	1.33

MATERIAL: A286 corrosion resistant steel per AMS 5255 (UNS S66286).

FINISH: Cadmium plate per QQ-P-416, Type II, Class 2 and Kaylube molybdenum disulfide dry lubricant per MIL-L-46010.

PERFORMANCE: BPS-N-70, class 125 TC4.

FLOATABILITY: .030 minimum radially from center.

F51602

ANCHOR NUT
FLOATING, TWO-LUG, CRES

F51602