
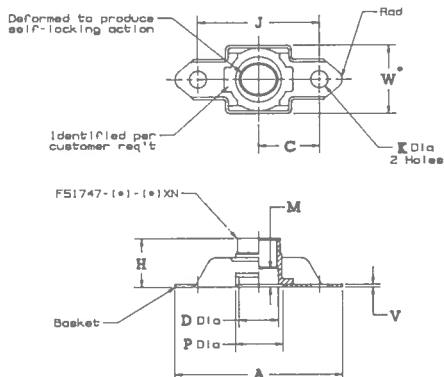




PART NUMBERS	THREAD (MIL-S-9879)	A (MAX)	C (MAX)	D (MIN)	H (MAX)	J	K (MAX)	M ±.010	P (MAX)	V (MAX)	W (MAX)
F51747-3	.1900-32UNJF-36	.953	.349 .338	.104	.220			.070			
					.290			.125			
					.353	.890	.103	.187	.287	.030	.410
					.415	.898	.098	.250	.257		
					.478			.312			
					.540			.375			
F51747-4	.2500-28UNJF-36	1.270	.505 .495	.254	.282			.070			
					.335			.125			
					.398	1.002	.103	.187	.323	.030	.505
					.460	.898	.098	.250	.313		
					.522			.312			
					.585			.375			
F51747-5	.3125-24UNJF-36	1.292	.505 .495	.317	.331			.070			
					.381			.125			
					.423	1.002	.135	.187	.392	.030	.805
					.486	.898	.130	.250	.372		
					.548			.312			
					.611			.375			

MATERIAL: Nut & basket - A286 corrosion-resistant steel per AMS5525, AMS5732 or AMS5737.

FINISH: F51747- Nut - silver plated per AMS2410.
Basket - passivated or silver plated. (Manufacturer's option).
F51747-(*)-(*)CD- Nut & basket - cadmium plated per Fed. Spec. QQ-P-416, Type II, Class 2 and kaylube molybdenum disulfide dry lubricant coated.
F51747-(*)-(*)DL- Nut - kaylube molybdenum disulfide dry lubricant coated.
Basket - passivated or kaylube. (Manufacturer's option).

PERFORMANCE: BPS-N-70, Class 125TC4 and 125TC8.

FLOATABILITY: .030 min radially float applies to -3-1, -4-1, and -5-1 sizes only.
.025 min radially on other sizes.

TEMPERATURE RANGE: NO code - 800°F.
"CD" code and "DL" code - 450°F.

NOTES: 1. "W" dimension is maximum when nut is in floated position.
2. The nut element can be removed by using the kaylock W19341 tool.