
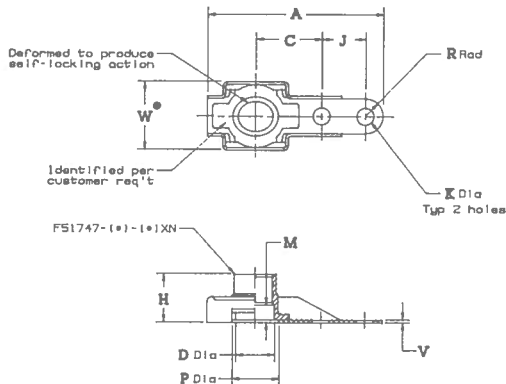




PART NUMBERS		THREAD (MIL-S-8879)	A (MAX)	C (MIN)	D (MIN)	H (MAX)	J	K ±.010	M ±.010	P (REF)	R (MAX)	V (MAX)	W (MAX)
F51751-3-	1	.1800-32 UNJF-3B	1.012	.349 .338	.184	.220	.314 .310	.103 .088	.070	.267 .257	.125	.025	.422
	2					.280			.125				
	3					.353			.187				
	4					.415			.250				
	5					.478			.312				
	6					.540			.375				
F51751-4-	1	.2500-28 UNJF-3B	1.252	.505 .485	.254	.282	.314 .310	.103 .088	.070	.323 .312	.125	.030	.531
	2					.335			.125				
	3					.398			.187				
	4					.480			.250				
	5					.522			.312				
	6					.585			.375				

MATERIAL:

Nut & basket - A286 corrosion-resistant steel per AMS 5525, AMS 5732 or AMS 5737.

FINISH:

F51751- Nut - silver plated per AMS2410.
Basket-passivated or silver plated. (Manufacturer's option).
F51751-(*)-(*)CD- Nut & basket - cadmium plated per Fed. Spec. QQ-P-418, Type II, Class 2 and kaylube molybdenum disulfide dry lubricant coated.
F51751-(*)-(*)DL- Nut - kaylube molybdenum disulfide dry lubricant coated.
Basket - passivated or kaylube molybdenum disulfide dry lubricant coated. (Manufacturer's option)

PERFORMANCE:

BPS-N-70, Class 125TC4 and 125TC8.

FLOATABILITY:

.030 min radially float applies to -3-1, -4-1 sizes only.
.025 min radially on other sizes.

TEMPERATURE RANGE:

N0 code - 800°F.
"CD" code and "DL" code - 450°F.

NOTES:

1. "W" dimension is maximum when nut is in floated position.
2. The nut element can be removed by using the kaylock W18341 tool.

F51751

**ANCHOR NUT
ONE-LUG, FLOATING,
REPLACEABLE NUT ELEMENT**

F51751