
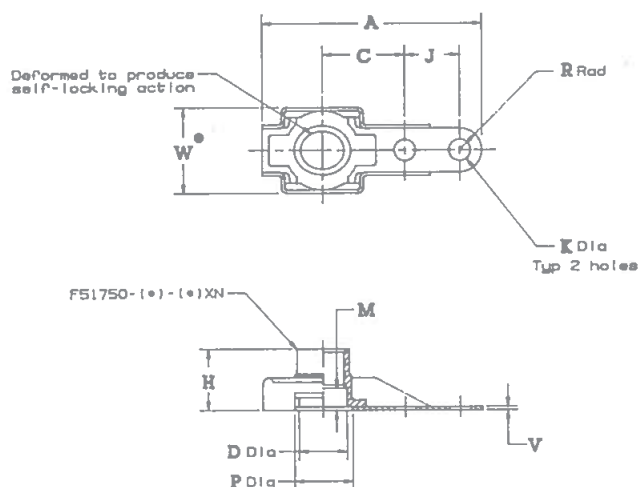




PART NUMBERS		THREAD (MIL-S-8878)	A (MAX)	C	D (MIN)	H (MAX)	J	K	M ±.010	P	R (REF)	V (MAX)	W (MAX)
F51752-3-	1	.1900-32 UNF-3B	1.012	.348 .338	.194	.220	.314 .310	.103 .098	.070	.287 .257	.125	.025	.422
	2					.260			.125				
	3					.353			.187				
	4					.415			.250				
	5					.478			.312				
	6					.540			.375				
F51752-4-	1	.2500-28 UNF-3B	1.252	.505 .465	.254	.282	.314 .310	.103 .098	.070	.323 .312	.125	.030	.531
	2					.335			.125				
	3					.398			.187				
	4					.480			.250				
	5					.522			.312				
	6					.585			.375				

- MATERIAL:** Nut & basket - carbon steel.
- HEAT TREAT:** Rc. 48 max.
- FINISH:** Nut & basket - cadmium plated per Fed. Spec. QQ-P-416, Type II, Class 2 and kaylube molybdenum disulfide dry lubricant coated.
- PERFORMANCE:** BPS-N-70, Class 125TA4.
- FLOATABILITY:** .030 min radially float applies to -3-1, -4-1 sizes only.
.025 min radially on other sizes.
- TEMPERATURE RANGE:** 450°F.
- NOTES:**
1. "W" dimension is maximum when nut is in floated position.
 2. The nut element can be removed by using the kaylock W19341 tool.

F51752

ANCHOR NUT
ONE-LUG, FLOATING
REPLACEABLE NUT ELEMENT

F51752