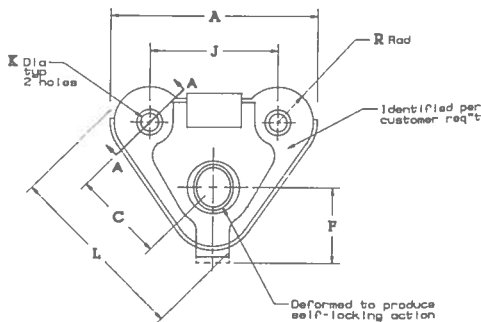



PART NUMBERS	THREAD (MIL-S-8879)	A (MAX)	C ±.005 (MIN)	D (MIN)	F (MAX)	H (MAX)	J ±.002 (MAX)	K ±.005 -.000	L (MAX)	P ±.005 (MAX)	R (MAX)	T ±.005
F51753-3	.1800-32 UNJF-36	.788	.344	.184	.288	.252	.486	.068	.782	.257	.135	.077
F51753-4	.2500-28 UNJF-36	1.078	.254	.321	.281		.707		1.038	.314	.155	.103
F51753-5	.3125-24 UNJF-36	1.094	.500	.317	.363	.283		.130	1.058	.377	.185	

MATERIAL:

Nut & basket - A286 corrosion-resistant steel per AMS5525, or AMS5732.

FINISH:

F51753 - Nut - silver plated per AMS2410.
Basket - passivated or silver plated. (Manufacturer's option).
F51753-(*)-(*)CD - Nut & basket - cadmium plated per Fed. Spec. QQ-P-418, Type II, Class 2, plus kaylube molybdenum disulfide dry lubricant coated.
F51753-(*)-(*)DL - Nut - kaylube molybdenum disulfide dry lubricant coated.
Basket - passivated or kaylube. (Manufacturer's option).

PERFORMANCE:

BPS-N-70, Class 125TC4 and 125TC8.

FLOATABILITY:

.025 min radially from centered position.

TEMPERATURE RANGE:

NO code - 800°F.
"CD" code and "DL" code - 450°F.

NOTES:

1. The nut element can be removed by using the keylock W51753-(*) tool.

F51753

**ANCHOR NUT
CORNER FLOATING
REPLACEABLE NUT ELEMENT**

F51753