


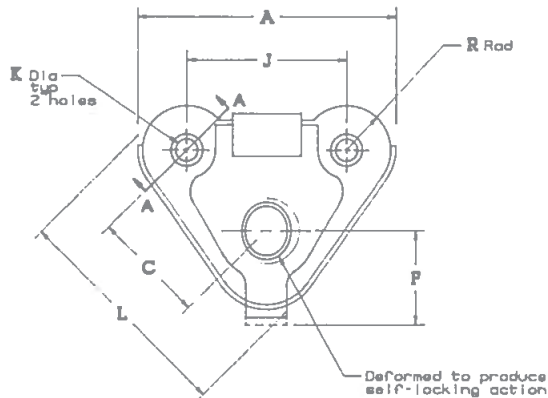




PART NUMBERS	THREAD (MIL-S-8879)	A (MAX)	C ±.005 (MIN)	D (MIN)	P (MAX)	H (MAX)	J ±.002	K +.005 -.000	L (MAX)	P ±.005	R (MAX)	T ±.005	
F51754-3	.1000-32 UNJF-3B	.786	.344	.104	.268	.252	.486	.098	.782	.257	.135	.077	
F51754-4	.2500-28 UNJF-3B	1.079	.500	.254	.321	.261	.707		1.038	.314	.155	.103	
F51754-5	.3125-24 UNJF-3B	1.084		.317	.383	.293			1.058	.377	.165		

MATERIAL: Nut & basket - carbon steel.

HEAT TREAT: Nut - Rc. 46 max.

FINISH: Nut & basket - cadmium plated per Fed. Spec. QQ-P-416, Type II, Class 3, plus kaylube molybdenum disulfide dry lubricant coated.

PERFORMANCE: BPS-N-70, Class 125TA4.

FLOATABILITY: .025 min radially from centered position.

TEMPERATURE RANGE: 450°F.

NOTES: 1. The nut element can be removed by using the kaylock W51753-(*) tool.

F51754

ANCHOR NUT
CORNER, FLOATING,
REPLACEABLE NUT ELEMENT

F51754