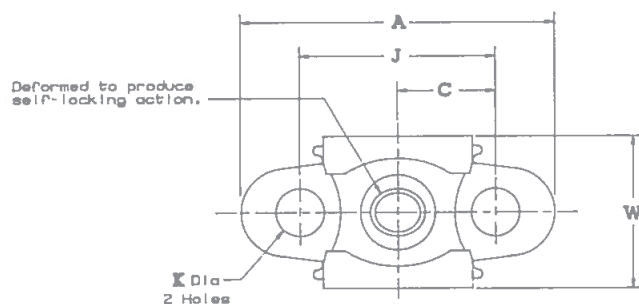



PART NUMBERS	THREAD (MIL-S-8878)	A (MAX)	C ±.005	H (MAX)	J ±.002	K +.005 -.000	M (MIN)	P (REF)	V ±.005	W (MAX)
F52107-08	.1840-32 UNJC-38	.840	.344	.328	.888	.088	.125	.250	.025	.500
F52107-3	.1800-32 UNJF-38			.408			.141	.312		.562
F52107-4	.2500-28 UNJF-38	1.285		.500	1.000		.188	.375		.735
F52107-5	.3125-24 UNJF-38	1.292		.630		.130	.261	.437		.770
F52107-6	.3750-24 UNJF-38			.728	1.250	.161	.250	.562	.032	.889
F52107-7	.4375-20 UNJF-38	1.802	.825	.843						
F52107-8	.5000-20 UNJF-38									

MATERIAL: Nut and basket --- carbon steel, heat treated.

FINISH: Nut and basket --- cadmium plate per Fed. Spec. QQ-P-418, Class 3, plus kaylube molybdenum disulfide dry lubricant coat.

PERFORMANCE: MIL-N-25027, except reusability of 100 cycles.

MISALIGNMENT: 8° in any direction from centered position (-08 thru -5 sizes only)
3° in any direction from centered position (-8 thru -8 sizes only)

TEMPERATURE: 450°F.

F52107

ANCHOR NUT
FLOATING, TWO-LUG
SELF-ALIGNING

F52107