
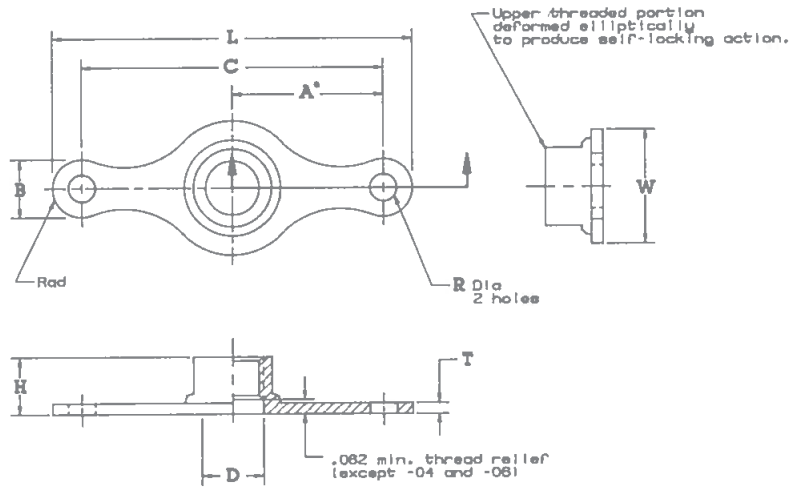


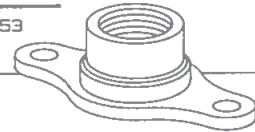

PART NUMBERS	THREAD (MIL-S-8878)	A* ±.005 (REF)	B ±.002 (REF)	C ±.002 (MIN)	D (MAX)	H (MAX)	L (MAX)	R ±.005 (REF) -.000	T (MAX)	W (MAX)	APPROX WT. LBS/100
K1001-04	.1120-40 UNJC-38	.344	.215	.888	—	.130	.948	.098	.025	.280	.10
K1001-06	.1380-32 UNJC-38				—	.145			.025	.285	.14
K1001-08	.1640-32 UNJC-38				.188	.215			.032	.297	.19
K1001-3	.1800-32 UNJF-38	.500	.265	1.000	.194	.220	1.280	.130	.040	.414	.22
K1001-4	.2500-28 UNJF-38				.254	.281			.050	.505	.43
K1001-5	.3125-24 UNJF-38				.317	.328			.055	.814	.68
K1001-6	.3750-24 UNJF-38	.582	.327	1.125	.379	.344	1.477	.161	.074	.719	.87
K1001-7	.4375-20 UNJF-38				.442	.390			.074	.719	1.65

*The center of the tapped hole shall not deviate from the center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
Use part number K1031 for silver plated, per AMS2410. Temperature range 800°F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Example: K1001-3P.
(Refer to engineering data section for "P" details).

APPLICATION: These anchor nuts are for use in blind applications where a fixed nut will aid assembly and maintenance in areas where space is restricted and floating anchor nut are not required.
Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements. The anchor nuts on this page are interchangeable with MS21048, NAS880 and NAS1023 in the various materials and finish conditions as applicable.
For full strength miniature series see MK1000, MK1031, MK1300, MK1301 and MK1331.

K1001

ANCHOR NUT
TWO-LUG

K1001