
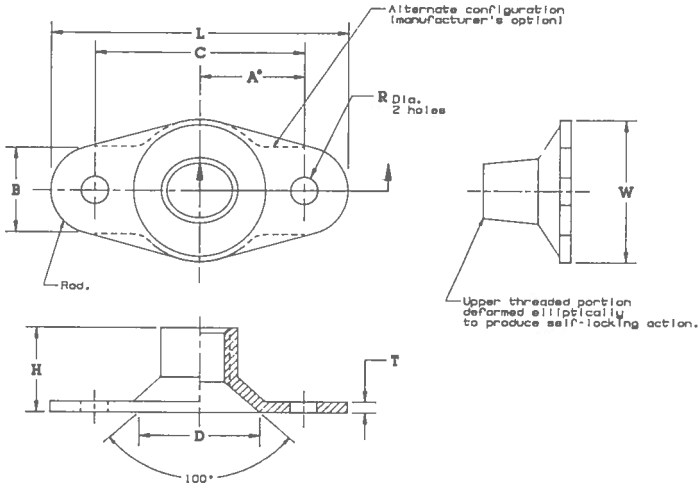




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005 (REF)	B ±.002 (REF)	C ±.005	D (MAX)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS/100
K1101-08	.1840-32 UNJC-3B	.344	.215	.688	.365	.272	.948	.088	.032	.422	.30
K1101-3	.1900-32 UNJF-3B				.411	.281				.453	.32
K1101-4	.2500-28 UNJF-3B	.500		1.000	.540	.340	1.280		.040	.618	.50

Tolerances, unless otherwise specified: decimals ±.015 inches, angles ±1°.
 *The center of the tapped hole shall not deviate from the center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
 Use part number K1131 for silver plated per AMS2410. Temperature range 800°F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Examples: K1101-4P.
 (Refer to engineering data section for "P" details).

APPLICATION: These anchor nuts are for use in blind application areas where the attaching sheets are dimpled for 100° flush head screws and a fixed nut will aid assembly and maintenance.
 Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.
 K1101 and K1131 are used in areas requiring non-magnetic materials or corrosion-resistant steel.
 The anchor nuts on this page are interchangeable with MS21050, NAS681 and NAS1024 in the various materials and finish conditions as applicable.

K11Ø1

ANCHOR NUT
 TWO-LUG, 100° COUNTERSUNK

K11Ø1