
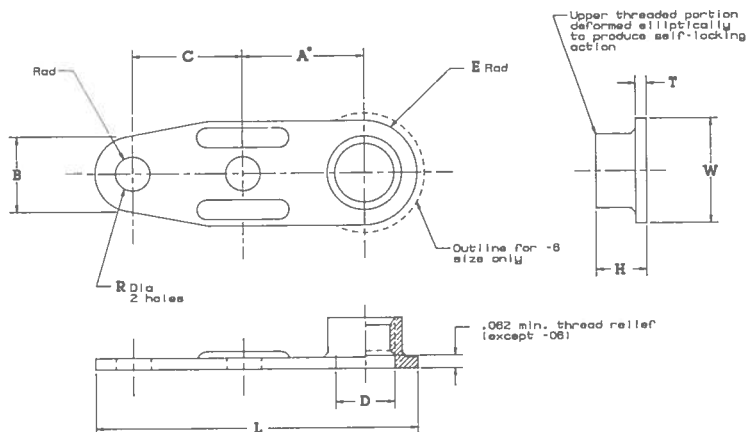




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005	B (REF)	C ±.002	D (MIN)	E (REF)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS/100
K2000-08	.1380-32 UNJC-36				—	.149	.145	.835			.297	.25
K2000-08	.1640-32 UNJC-36	.344	.215		.188	.184	.215	.835		.032	.328	.30
K2000-3	.1900-32 UNJF-36			.312	.194	.207	.220	.950	.098			
K2000-4	.2500-28 UNJF-36				.254	.281	.281	.993		.040	.414	.50
K2000-5	.3125-24 UNJF-36	.500	.265		.317	.328	1.210		.130	.050	.505	.91
K2000-6	.3750-24 UNJF-36				.378	.307	.344	1.264		.055	.614	1.06

*The center of the topped hole shall not deviate from the center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: Carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. DD-P-416, Type II plating.
Kaytube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Example: K2000-3BC.
(Refer to engineering data section for "BC" details).

APPLICATION: These anchor nuts are for use in blind applications where a fixed nut will aid assembly and maintenance, and where space limitations prohibit the use of two-lug or corner anchor nuts. Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements. For the full strength miniature series see MK2000, MK2001, MK2031, MK2300, MK2301 and MK2331. For alternate miniature design see MK4000, MK4001, MK4031, MK4300, MK4301 and MK4331. K2000 is interchangeable with MS21051, NAS882 and NAS1025 in the various materials and finish conditions as applicable.

K20000

ANCHOR NUT
ONE-LUG

K20000