
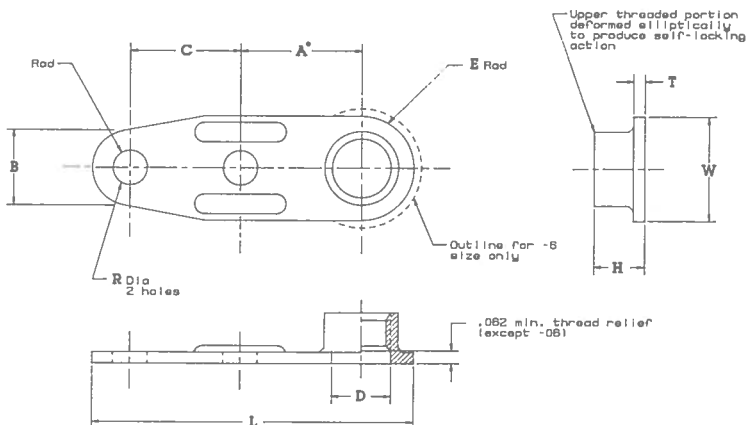




PART NUMBERS	THREAD (MIL-S-8878)	A* ±.005 (REF)	B ±.002 (REF)	C (MIN)	D (REF)	E (MAX)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS/100
K2001-06	.1380-32 UNJC-3B			—	.149	.145	.935			.032	.297	.25
K2001-08	.1640-32 UNJC-3B	.344	.215	.188	.184	.215	.950	.098			.328	.30
K2001-3	.1900-32 UNJF-3B			.312	.184	.220	.950			.040	.414	.50
K2001-4	.2500-28 UNJF-3B				.254	.207	.993			.050	.505	.91
K2001-5	.3125-24 UNJF-3B	.500	.265		.317	.253	1.210	.130		.055	.614	1.06
K2001-6	.3750-24 UNJF-3B				.379	.307	1.284					

*The center of the tapped hole shall not deviate from the center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
Use part number K2031 for silver plated per AMS2410. Temperature range 800°F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Example: K2031-3P.
(Refer to engineering data section for "P" details).

APPLICATION: These anchor nuts are for use in blind applications where a fixed nut will aid assembly and maintenance, and where space limitations prohibit the use of two-lug or corner anchor nuts. Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements. K2001 and K2031 are used in areas requiring non-magnetic materials or corrosion-resistant steel.
For the full strength miniature series see MK2000, MK2001, MK2031, MK2300, MK2301 and MK2331. For alternate miniature design see MK4000, MK4001, MK4031, MK4300, MK4301 and MK4331.
K2001 and K2031 are interchangeable with MS21052 and NAS682 in the various materials and finish conditions as applicable.

K20001

ANCHOR NUT
ONE-LUG

K20001