
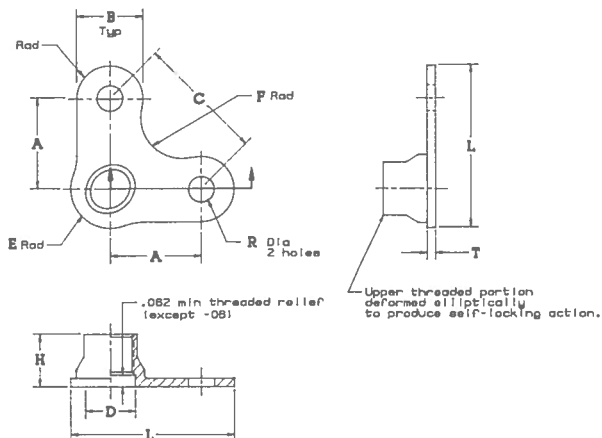




PART NUMBERS	THREAD (MIL-S-8879)	A° ±.005	B (REF)	C ±.002	D (MIN)	E (REF)	F (REF)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	APPROX. WT. LBS/100
K3000-06	.1380-32 UNJC-3B	.344	.250	.488	—	.133	.125	.145	.837	.088	.032	.20
K3000-06	.1840-32 UNJC-3B				.188	.148	.215	.215	.853			.24
K3000-3	.1900-32 UNJF-3B				.184	.184	.156	.220	.853			.25
K3000-4	.2500-28 UNJF-3B	.500	.322	.707	.254	.207	.312	.281	.852	.130	.040	.50
K3000-5	.3125-24 UNJF-3B				.317	.253	.375	.328	.914			.77
K3000-8	.3750-24 UNJF-3B				.378	.307		.344	.968			.85
K3000-7	.4375-20 UNJF-3B	.562	.342	.795	.442	.383	.312	.380	1.101	.181	.074	1.68

Tolerances, unless otherwise specified: decimals ±.015 inches, angles ±1°.

MATERIAL: Carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. QQ-P-416, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Example: K3000-3BC.
(Refer to engineering data section for "BC" details).

APPLICATION: These anchor nuts are for use in blind corner applications to aid assembly and maintenance where the arrangement of the line lugs is not possible. Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements. For the full strength miniature series see MK3000, MK3001, MK3031, MK3300, MK3301 and MK3331.
The anchor nuts on this page are interchangeable with NS21055 and NAS884 and NAS1027 in the various materials and finish conditions as applicable.

K30000

**ANCHOR NUT
CORNER**

K30000