



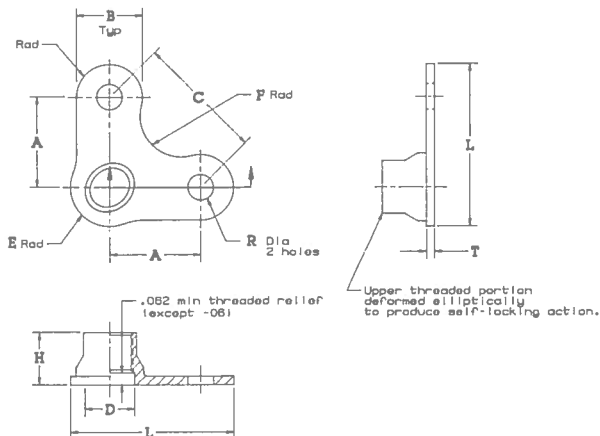

Div Microdot Inc

800 So. State College Blvd. Fullerton, Ca. 92631 FSCM 15653



PART NUMBERS	THREAD (MIL-S-8878)	A* ±.005	B (REF) ±.002	C (MIN)	D (REF)	E (REF)	F (REF)	H (MAX)	L (MAX)	R ±.005 (.000)	T (REF)	APPROX. WT. LBS/100
K3001-08	.1380-32 UNJC-3B				—	.133	.125	.145	.637			.20
K3001-08	.1640-32 UNJC-3B	.344	.250	.488	.188	.148	.215	.215		.088	.032	.24
K3001-3	.1900-32 UNJF-3B				.184	.164	.158	.220	.653			.25
K3001-4	.2500-28 UNJF-3B				.254	.207	.312	.281	.852		.040	.50
K3001-5	.3125-24 UNJF-3B	.500	.322	.707	.317	.253	.375	.328	.914	.130	.050	.77
K3001-6	.3750-24 UNJF-3B				.378	.307		.344	.988		.055	.85

Tolerances, unless otherwise specified: decimals ±.015 inches, angles ±1°.

MATERIAL:

A286 corrosion-resistant steel.

FINISH:

Kaylube molybdenum disulfide dry lubricant coated.
Use part number K3031 for silver plated per AMS2410. Temperature 900° F.

PROCUREMENT SPEC:

MIL-N-25027.

TEMPERATURE RANGE:

450°F.

VARIATIONS:

Add "P" for bottom projection weld ribs. Examples K3001-3P.
(Refer to engineering data section for "P" detail).

APPLICATION:

These anchor nuts are for use in blind corner applications to aid assembly and maintenance where the arrangement of the line lugs is not possible.
Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements. K3001 and K3031 are used in areas requiring non-magnetic materials or corrosion-resistant steel.
For the full strength miniature series see MK3000, MK3001, MK3031, MK3300, MK3301 and MK3331.
The K3001 and K3031 are interchangeable with MS21056 and NAS884 in the various materials and finish conditions as applicable.

K3001

ANCHOR NUT
CORNER

K3001