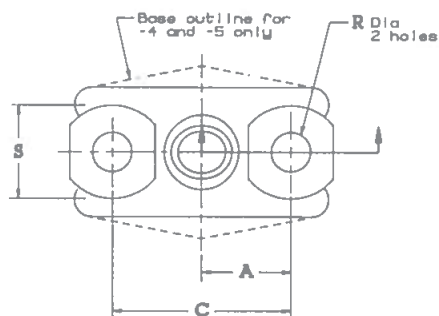



PART NUMBERS	THREAD (MIL-S-8879)	A ±.005	C ±.002	D (MIN)	H (MAX)	L (MAX)	Q** (REF)	R +.005 -.000	S (REF)	T (REF)	W* (MAX)	APPROX WT. LBS/100
MF1001-04	.1120-40 UNJC-38	.203	.408	—	.153	.851	.182				.295	.24
MF1001-06	.1380-32 UNJC-38	.218	.437	—	.170	.882	.188			.110	.315	.27
MF1001-08	.1640-32 UNJC-38	.234	.468	.168	.250	.707	.214	.098	.230		.327	.32
MF1001-3	.1900-32 UNJC-38	.250	.500	.194	.739	.240				.125	.327	.35
MF1001-4	.2500-28 UNJC-38	.281	.562	.254	.281	.801	.300				.431	.49

*When nut is in centered position, a minimum of .020 inches must be allowed on each side of the basket for full float.

**Hole in basket allows full float.

MATERIAL:

Nut & basket - A286 corrosion-resistant steel, heat treated.

FINISH:

Nut & Basket - kaylube molybdenum disulfide dry lubricant coated. Use part number MF1031 for silver plated per AMS 2410 on nut. Temperature range 900° F. Basket may be silver plated or passivated (manufacturer's option)

PROCUREMENT SPEC:

MIL-N-25027.

FLOATABILITY:

.020 radially from center, minimum.

TEMPERATURE RANGE:

450°F.

APPLICATION:

For use where design requires full strength miniature adaptations of the standard floating two-lug anchor nut. Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements. MF1001 is used in areas requiring non-magnetic materials or corrosion-resistant steel. The anchor nuts on this page are interchangeable with MS21078 and NAS1068 in the various materials and finish conditions as applicable.

MF1001

**ANCHOR NUT
MINIATURE
TWO-LUG, FLOATING**

MF1001