
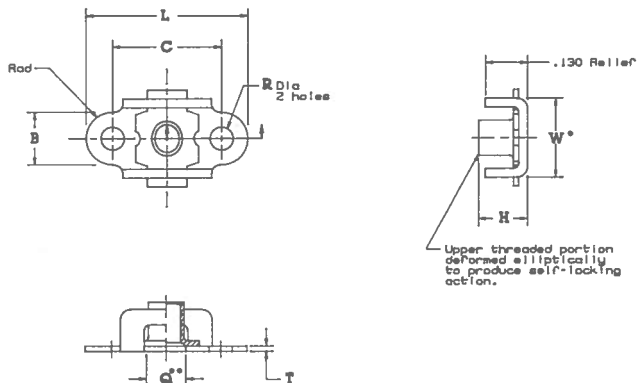




| PART NUMBERS | THREAD<br>(MIL-S-8879) | A<br>±.005 | B<br>(MIN) | C<br>±.002 (MIN) | D<br>(MAX) | H<br>(MAX) | L<br>(MAX) | Q**<br>(REF) | R<br>+.005<br>-.000 | S<br>(REF) | T<br>(REF) | W*<br>(MAX) | APPROX<br>WT.<br>LBS/100 |
|--------------|------------------------|------------|------------|------------------|------------|------------|------------|--------------|---------------------|------------|------------|-------------|--------------------------|
| MF1300-02    | .0890-56 UNJC-36       | —          | —          | .296             | —          | .140       | .458       | .152         | —                   | —          | —          | .275        | .07                      |
| MF1300-04    | .1120-40 UNJC-36       | —          | .150       | —                | —          | .153       | —          | .086         | —                   | .025       | —          | .327        | .08                      |
| MF1300-08    | .1380-32 UNJC-36       | —          | —          | .343             | —          | .171       | .505       | .178         | —                   | —          | —          | .327        | .13                      |
| MF1300-5     | .3125-24 UNJF-36       | .358       | —          | .718             | .317       | .328       | 1.010      | .352         | .130                | .287       | .160       | .500        | .97                      |

\*When nut is in centered position, a minimum of .020 inches must be allowed on each side of the basket for full float.

\*\*Hole in basket allows full float.

**MATERIAL:** Nut & basket-carbon steel, heat treated.

**FINISH:** Cadmium plated per Fed. Spec. 00-P-418, Type II plating.  
Kajilube molybdenum disulfide dry lubricant coated after plating.

**PROCUREMENT SPEC:** MIL-N-25027.

**FLOATABILITY:** .020 radially from center, minimum.

**TEMPERATURE RANGE:** 450°F.

**APPLICATION:** For use where design requires full strength miniature adaptations of the standard floating two-lug anchor nut.  
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.  
The anchor nuts on this page are interchangeable with MS21075 and NAS1068 in the various materials and finish conditions as applicable.

MF13000

**ANCHOR NUT  
MINIATURE  
TWO-LUG, FLOATING**

MF13000