



Upper threaded portion
deformed elliptically
to produce self-locking action.

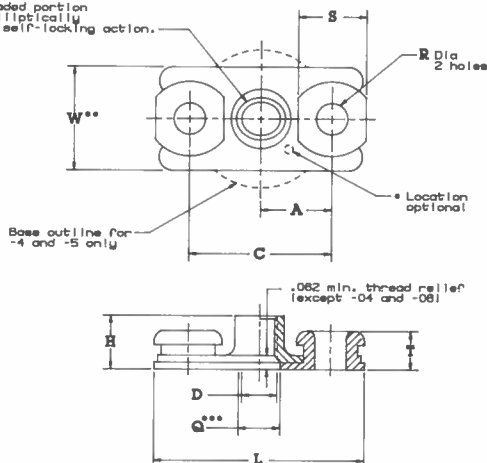

PART NUMBERS	THREAD (MIL-S-8879)	A	C	D	H	L	Q**	R	S	T	W**	AXIAL TENSILE STRENGTH LBS. MIN.	APPROX. WT. LBS./100
MF1400-04	.1120-40 UNJC-3B	.203	.408	—	.153	.851	.182				.295	1120	.24
MF1400-06	.1380-32 UNJC-3B	.218	.437	—	.170	.882	.188			.110	.315	1800	.27
MF1400-08	.1840-32 UNJC-3B	.234	.468	.188	.250	.707	.214	.088	.230		.327	2500	.32
MF1400-3	.1900-32 UNJF-3B	.250	.500	.194	.250	.739	.240			.125	.431	3620	.35
MF1400-4	.2500-28 UNJF-3B	.281	.582	.254	.281	.801	.300				.431	6470	.48
MF1400-5	.3125-24 UNJF-3B	.359	.718	.317	.328	1.010	.352	.130	.257	.180	.500	10200	.97

* High tensile identification mark.

** When nut is in centered position, a minimum of .020 inches must be allowed on each side of the basket for full float.

*** Hole in basket allows full float.

MATERIAL:

Nut & basket-carbon steel, heat treated.

FINISH:

Cadmium plated per Fed. Spec. QQ-P-418, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC:

MIL-N-25027, except that the axial tensile strength, as tabulated, is equivalent to 180,000 psi at the pitch diameter and will be obtained when tested on bolts or screws having a minimum tensile strength of 180,000 psi.

FLOATABILITY:

.020 radially from center, minimum.

TEMPERATURE RANGE:

To 450°F.

APPLICATION:



Full strength minimum adaptation at the standard floating 180,000 psi two-lug anchor nut. Specifically designed for use with MIL-S-7742 external threaded elements.

MF14000

ANCHOR NUT
MINIATURE TWO-LUG
180,000 PSI, 450° F. FLOATING

MF14000

Upper threaded portion
deformed elliptically
to produce self-locking action.

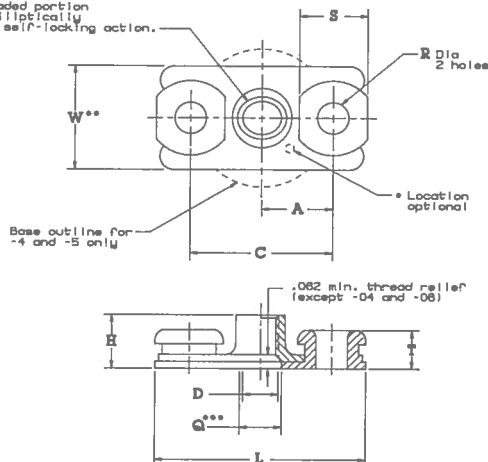

PART NUMBERS	THREAD (MIL-S-8879)	A	C	D	H	L	Q***	R	S	T	W**	AXIAL TENSILE STRENGTH LBS. MIN.	APPROX. WT. LBS./100
MF1400-04	.1120-40 UNJC-3B	.203	.408	—	.153	.651	.182				.295	1120	.24
MF1400-06	.1380-32 UNJC-3B	.218	.437	—	.170	.682	.188			.110	.315	1600	.27
MF1400-08	.1840-32 UNJC-3B	.234	.468	.188	.250	.707	.214	.088	.230		.327	2500	.32
MF1400-3	.1900-32 UNJF-3B	.250	.500	.194	.250	.739	.240			.125	.431	3820	.35
MF1400-4	.2500-28 UNJF-3B	.281	.582	.254	.281	.801	.300				.431	8470	.48
MF1400-5	.3125-24 UNJF-3B	.359	.718	.317	.328	1.010	.352	.130	.257	.180	.500	10200	.87

* High tensile identification mark.

** When nut is in centered position, a minimum of .020 inches must be allowed on each side of the basket for full float.

*** Hole in basket allows full float.

MATERIAL:

Nut & basket-carbon steel, heat treated.

FINISH:

Cadmium plated per Fed. Spec. QQ-P-418, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC:

MIL-N-25027, except that the axial tensile strength, as tabulated, is equivalent to 180,000 psi at the pitch diameter and will be obtained when tested on bolts or screws having a minimum tensile strength of 180,000 psi.

FLOATABILITY:

.020 radially from center, minimum.

TEMPERATURE RANGE:

To 450°F.

APPLICATION:



Full strength minimum adaptation at the standard floating 180,000 psi two-lug anchor nut. Specifically designed for use with MIL-S-7742 external threaded elements.

MF1400

**ANCHOR NUT
MINIATURE TWO-LUG
180,000 PSI, 450°F. FLOATING**

MF1400

Upper threaded portion
deformed elliptically
to produce self-locking action.

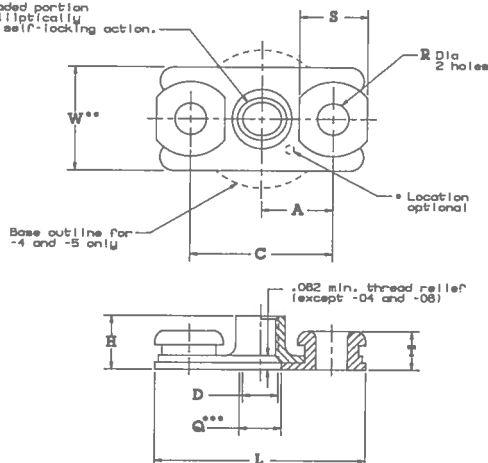

PART NUMBERS	THREAD (MIL-S-8879)	A	C	D	H	L	Q***	R	S	T	W**	AXIAL TENSILE STRENGTH LBS. MIN.	APPROX. WT. LBS./100
MF1400-04	.1120-40 UNJC-38	.203	.408	—	.153	.851	.182				.295	1120	.24
MF1400-06	.1380-32 UNJC-38	.218	.437	—	.170	.882	.188			.110	.315	1800	.27
MF1400-08	.1840-32 UNJC-38	.234	.468	.188	.250	.707	.214	.088	.230		.327	2500	.32
MF1400-3	.1800-32 UNJF-38	.250	.500	.194	.250	.739	.240			.125	.431	3820	.35
MF1400-4	.2500-28 UNJF-38	.281	.582	.254	.281	.801	.300				.431	8470	.48
MF1400-5	.3125-24 UNJF-38	.358	.718	.317	.328	1.010	.352	.130	.257	.180	.500	10200	.97

* High tensile identification mark.

** When nut is in centered position, a minimum of .020 inches must be allowed on each side of the basket for full float.

*** Hole in basket allows full float.

MATERIAL:

Nut & basket-carbon steel, heat treated.

FINISH:

Cadmium plated per Fed. Spec. QQ-P-418, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC:

MIL-N-25027, except that the axial tensile strength, as tabulated, is equivalent to 180,000 psi at the pitch diameter and will be obtained when tested on bolts or screws having a minimum tensile strength of 180,000 psi.

FLOATABILITY:

.020 radially from center, minimum.

TEMPERATURE RANGE:

To 450°F.

APPLICATION:

Full strength minimum adaptation at the standard floating 180,000 psi two-lug anchor nut. Specifically designed for use with MIL-S-7742 external threaded elements.

MF14000

ANCHOR NUT
MINIATURE TWO-LUG
160,000 PSI, 450° F. FLOATING

MF14000