


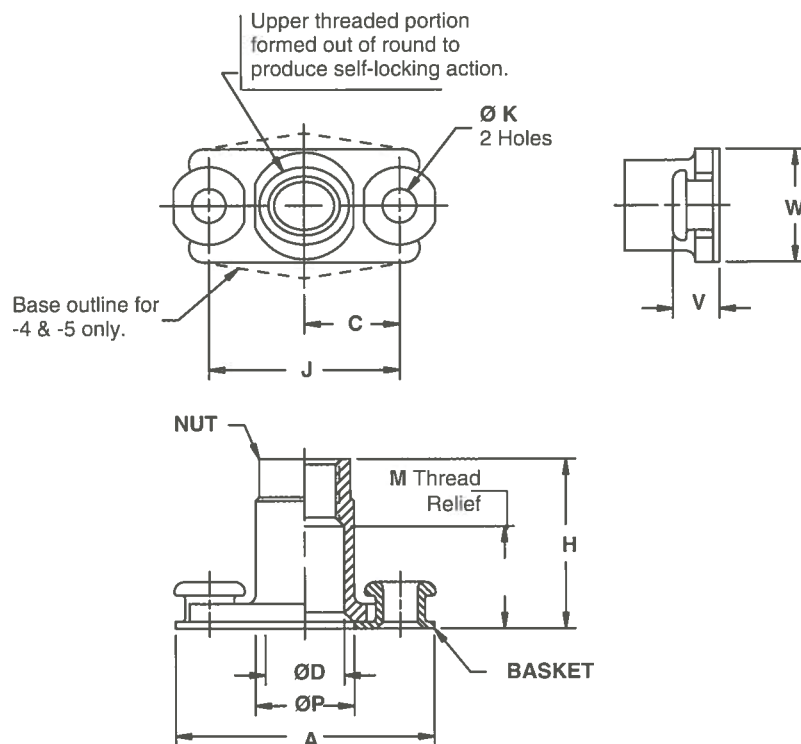

MF51594

MATERIAL: A286 corrosion resistant steel per AMS 5525, AMS 5732 or AMS 5737 (UNS S66286).

FINISH: Cadmium plate per QQ-P-416, Type II, Class 2 and Kaylube molybdenum disulfide dry film lubricant per MIL-L-46010.

PERFORMANCE: BPS-N-70, class 125TC4.

FLOATABILITY: .020 minimum radially from center.

NOTES: Centered position, floated width = "W" + .040.

MF51594

ANCHOR NUT

MF51594

FLOATING, TWO-LUG, DEEP C'BORE, CRES

PART NUMBER	THREAD (MIL-S-8879)	A MAX	C ±.005	D MIN	H MAX	J ±.004	K +.005 -.000	M MIN	P REF	V REF	W MAX	APPROX WT LBS/100
MF51594-3-1	.1900-32 UNJF-3B	.739	.250	.194	.250	.500	.098	.063	.240	.125	.327	.34
MF51594-3-2	.1900-32 UNJF-3B	.739	.250	.194	.312	.500	.098	.125	.240	.125	.327	.37
MF51594-3-3	.1900-32 UNJF-3B	.739	.250	.194	.375	.500	.098	.188	.240	.125	.327	.45
MF51594-3-4	.1900-32 UNJF-3B	.739	.250	.194	.438	.500	.098	.250	.240	.125	.327	.48
MF51594-3-5	.1900-32 UNJF-3B	.739	.250	.194	.500	.500	.098	.313	.240	.125	.327	.53
MF51594-3-6	.1900-32 UNJF-3B	.739	.250	.194	.562	.500	.098	.375	.240	.125	.327	.56
MF51594-4-1	.2500-28 UNJF-3B	.801	.281	.254	.281	.562	.098	.063	.300	.125	.431	.50
MF51594-4-2	.2500-28 UNJF-3B	.801	.281	.254	.344	.562	.098	.125	.300	.125	.431	.55
MF51594-4-3	.2500-28 UNJF-3B	.801	.281	.254	.406	.562	.098	.188	.300	.125	.431	.61
MF51594-4-4	.2500-28 UNJF-3B	.801	.281	.254	.469	.562	.098	.250	.300	.125	.431	.68
MF51594-4-5	.2500-28 UNJF-3B	.801	.281	.254	.531	.562	.098	.313	.300	.125	.431	.75
MF51594-4-6	.2500-28 UNJF-3B	.801	.281	.254	.594	.562	.098	.375	.300	.125	.431	.81
MF51594-5-2	.3125-24 UNJF-3B	1.010	.359	.317	.391	.718	.130	.125	.352	.160	.500	1.10
MF51594-5-3	.3125-24 UNJF-3B	1.010	.359	.317	.453	.718	.130	.188	.352	.160	.500	1.25
MF51594-5-4	.3125-24 UNJF-3B	1.010	.359	.317	.516	.718	.130	.250	.352	.160	.500	1.35
MF51594-5-5	.3125-24 UNJF-3B	1.010	.359	.317	.578	.718	.130	.313	.352	.160	.500	1.45
MF51594-5-6	.3125-24 UNJF-3B	1.010	.359	.317	.641	.718	.130	.375	.352	.160	.500	1.55

MF51594

ANCHOR NUT

MF51594