
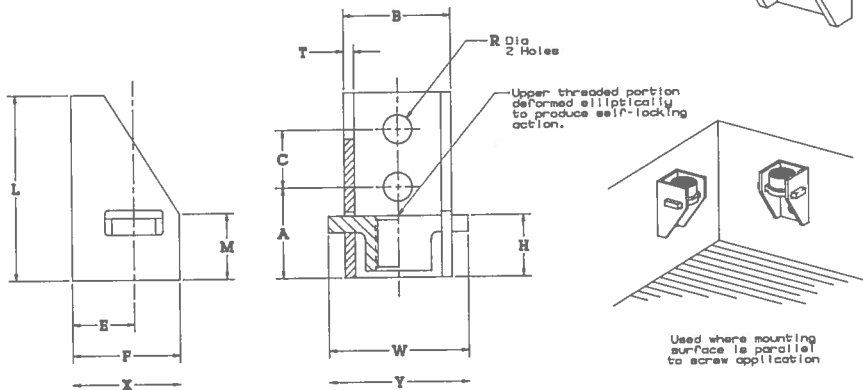




PART NUMBERS	THREAD (MIL-S-8879)	A	B	C	E	F	H	L	M	R	T	W	APPROX. WT. LBS/100
MF6300-04	.1120-40 UNJC-3B	.230	.266	.140	.156	.270	.145	.455	.185	.066	.025	.344	.24
MF6300-08	.1380-32 UNJC-3B												.23

Tolerances, unless otherwise specified: decimals: ± 0.015 inches.

MATERIAL:

Nut & basket - carbon or alloy steel, heat treated.
Use part number MF6301 and MF6331 for corrosion resistant steel.

FINISH:

Nut - cadmium plated per Fed. Spec. QQ-P-418, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

Basket - cadmium plated to Fed. Spec. QQ-P-418, Type II, Class 3.

MF6301 - Nut - Kaylube molybdenum disulfide dry lubricant coated.

Basket - Plain or Kaylube (manufacturer's option)

MF6331 - Nut - Silver plated, per AMS2410 - temperature range 900° F.

Basket - plain or silver plated (manufacturer's option)

PROCUREMENT SPEC: Self-locking torque per MIL-N-25027.

FLOATABILITY:

Minimum total float - "X" = .018, "Y" = .033.

TEMPERATURE RANGE: 450°F.

APPLICATION:

For use in applications where mounting areas very limited and where the screw is assembled in a direction parallel to the surface on which the nut is mounted. To be used in assemblies where manufacturing tolerances require floating anchor nuts.

Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.

MF6300

ANCHOR NUT
FLOATING, MINIATURE, RIGHT ANGLE

MF6300