
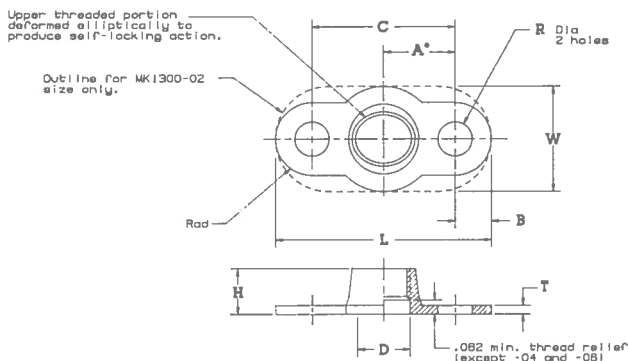




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005 (REF)	B (REF)	C ±.002 (MIN)	D (MAX)	H (MAX)	L (MAX)	R ±.005 -.000 (REF)	T (REF)	W (MAX)	APPROX. WT. LBS/100
MK1001-04	.1120-40 UNJC-3B	.203		.406	—	.130	.628		.025		.08
MK1001-06	.1380-32 UNJC-3B	.218		.437	—	.145	.657			.260	.12
MK1001-08	.1640-32 UNJC-3B	.234	.107	.468	.188	.215	.692	.098	.032		.17
MK1001-3	.1900-32 UNJF-3B	.250		.500	.194	.220	.724			.328	.20
MK1001-4	.2500-28 UNJF-3B	.281		.582	.254	.281	.786		.040	.414	.35
MK1001-5	.3125-24 UNJF-3B	.312	.125	.825	.317	.326	.900	.130	.050	.515	.60

*The center of the tapped hole shall not deviate from the center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
Use part number MK1031 for silver plated per AMS2410. Temperature range 900°F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Examples: MK1001-4P.
(Refer to engineering data section for "P" details).

APPLICATION: For use where design requires full strength miniature adaptations of the standard two-lug anchor nut.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.
MK1001 and MK1031 are used in areas requiring non-magnetic materials or corrosion-resistant steel.
The anchor nuts on this page are interchangeable with MS21070 and NAS887 in the various materials and finish conditions as applicable.

MK1000

ANCHOR NUT
MINIATURE, TWO-LUG

MK1000