
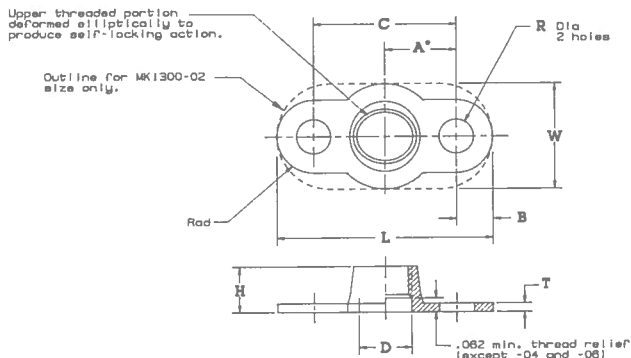




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005 (REF)	B ±.002 (REF)	C ±.002 (MIN)	D (MAX)	H (MAX)	L (MAX)	R +.005 -.000 (REF)	T (REF)	W (MAX)	APPROX WT. LBS/100
MK1300-02	.0880-58 UNJC-3B	.125		.250	—	.110	.410		.020	.162	.04
MK1300-04	.1120-40 UNJC-3B	.148	.081	.286	—	.130	.456	.068	.025	.164	.05
MK1300-06	.1380-32 UNJC-3B	.172		.343	—	.145	.503		.032	.242	.08
MK1300-5	.3125-24 UNJF-3B	.358	.145	.718	.317	.328	1.008		.050	.505	.62
MK1300-6	.3750-24 UNJF-3B	.414		.828	.378	.344	1.118	.130	.055	.614	.80

*The center of the tapped hole shall not deviate from the center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: Carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. QQ-P-418, Type II plating.
Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Examples: MK1300-3BC.
(Refer to engineering data section for "BC" details).

APPLICATION: For use where design requires full strength miniature adaptations of the standard two-lug anchor nut.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.
The anchor nuts on this page are interchangeable with MS21089 and NAS897 in the various materials and finish conditions as applicable.

MK13000

**ANCHOR NUT
MINIATURE TWO-LUG**

MK13000