
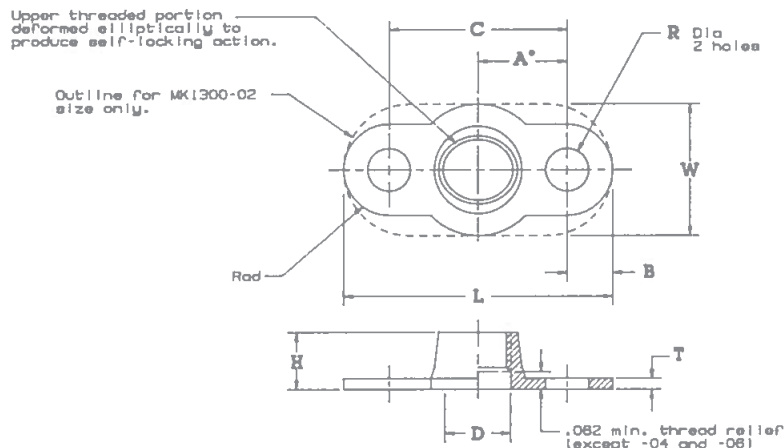




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005	B (REF)	C ±.002	D (MIN)	H (MAX)	L (MAX)	R ±.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS/100
MK1301-02	.0880-56 UNJC-36	.125		.250	—	.110	.410		.020	.162	.04
MK1301-04	.1120-40 UNJC-36	.148	.081	.298	—	.130	.458	.088	.025	.194	.05
MK1301-06	.1380-32 UNJC-36	.172		.343	—	.145	.503		.032	.242	.08
MK1301-5	.3125-24 UNJF-36	.359	.145	.718	.317	.328	1.008	.130	.050	.505	.82
MK1301-6	.3750-24 UNJF-36	.414		.828	.378	.344	1.118		.055	.614	.80

*The center of the tapped hole shall not deviate from the center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
Use part number MK1331 for silver plated per AMS2410. Temperature range 900°F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Example: MK1301-4P.
(Refer to engineering data section for "P" details).

APPLICATION: For use where design requires full strength miniature adaptations of the standard two-lug anchor nut.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements. MK1301 and MK1331 are used in areas requiring non-magnetic materials or corrosion-resistant steel.
The anchor nuts on this page are interchangeable with MS21070 and NAS897 in the various materials and finish conditions as applicable.

MK1301

ANCHOR NUT
MINIATURE, TWO-LUG

MK1301