
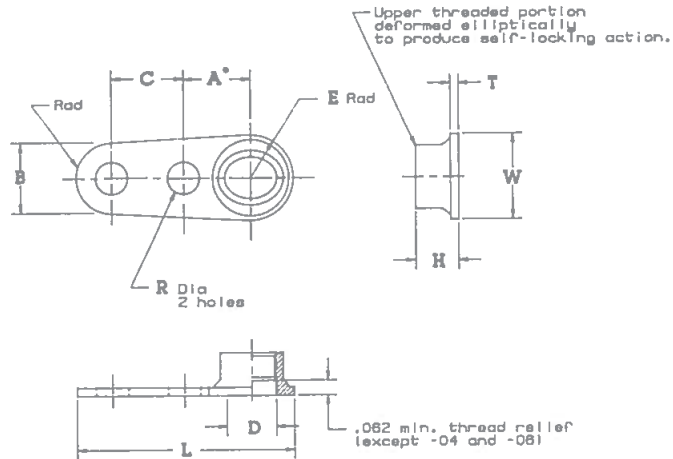




PART NUMBERS	THREAD (MIL-S-8878)	A* ±.005	B (REF)	C ±.002	D (MIN)	E (REF)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS./100
MK2000-04	.1120-40 UNJC-3B	.203	.215	.219	--	.125	.130	.860	.098	.025	.280	.10
MK2000-06	.1380-32 UNJC-3B	.218			--	.125	.145	.875				.13
MK2000-08	.1840-32 UNJC-3B	.234			.188		.215	.716		.032	.285	.17
MK2000-3	.1900-32 UNJF-3B	.250			.194	.158	.220	.745			.328	.22
MK2000-4	.2500-28 UNJF-3B	.281			.254	.203	.281	.822		.040	.414	.39

*The center of the tapped hole shall not deviate in any direction from the center line of the plate nut, as determined by the rivet holes, by more than .005.

- MATERIAL:** Carbon steel, heat treated.
- FINISH:** Cadmium plated per Fed. Spec. QQ-P-418, Type II plating.
Kaylube molybdenum disulfide dry lubricant coated after plating.
- PROCUREMENT SPEC:** MIL-N-25027.
- TEMPERATURE RANGE:** 450°F.
- VARIATIONS:** Add "BC" for bottom C'sunk rivet holes. Example: MK2000-3BC.
(Refer to engineering data section for "BC" details).
- APPLICATION:** For use where space and weight savings require full strength miniature adaptations of the standard one-lug anchor nut.
Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements.
The anchor nuts on this page are interchangeable with MS21071 and NAS698 in the various materials and finish conditions.

MK20000

ANCHOR NUT
MINIATURE, ONE-LUG

MK20000