
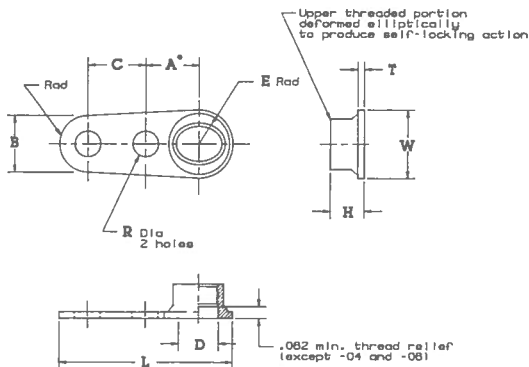




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005 (REF)	B ±.005 (REF)	C ±.002 (MIN)	D ±.005 (REF)	E ±.005 (REF)	H ±.005 (REF)	L ±.005 (REF)	R ±.005 (REF)	T ±.005 (REF)	W ±.005 (REF)	APPROX. WT. LBS/100
MK2300-04	.1120-40 UNJC-3B	.148	.142	.219	—	.092	.130	.550	.068	.025	.104	.06
MK2300-06	.1360-32 UNJC-3B	.171	—	—	—	.118	.145	.588	—	.032	.242	.10

*The center of the tapped hole shall not deviate in any direction from the center line of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: Carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. QQ-P-418, Type II plating.
Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Examples: MK2300-3BC.
(Refer to engineering data section for "BC" details).

APPLICATION: For use where space and weight savings require full strength miniature adaptations of the standard one-lug anchor nut.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.
The anchor nuts on this page are interchangeable with NAS898 in the various materials and finish conditions.

MK23000

ANCHOR NUT
MINIATURE, ONE-LUG

MK23000