
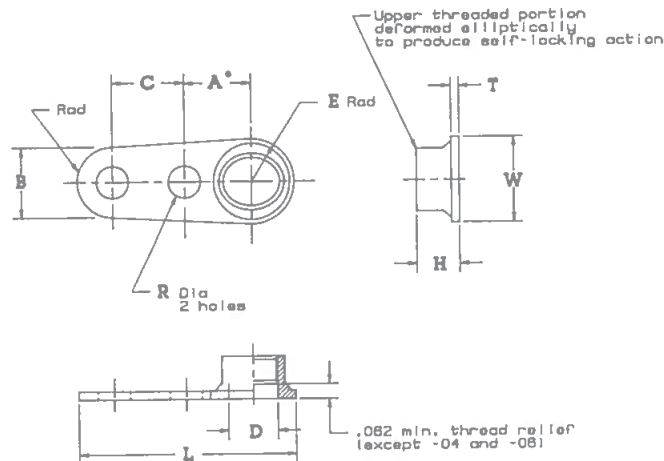




PART NUMBERS	THREAD (MIL-S-8878)	A* ±.005	B (REF)	C ±.002 (MIN)	D (REF)	E (MAX)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS/100
MK2301-04	.1120-40 UNJC-38	.148	.142	.219	--	.092	.130	.550	.068	.025	.194	.06
MK2301-08	.1380-32 UNJC-38	.171	.142	.219	--	.118	.145	.598	.068	.032	.242	.10

*The center of the tapped hole shall not deviate in any direction from the center line of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
Use part number MK2331 for silver plated per AMS2410. Temperature range 800° F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Examples: MK2301-3P
(Refer to engineering data section for "P" details).

APPLICATION: For use where space and weight savings require full strength miniature adaptations of the standard one-lug anchor nut.
Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements.
MK2301 and MK2331 is use in areas requiring non-magnetic materials or corrosion-resistant steel.
The anchor nuts on this page are interchangeable with NAS896 in the various materials and finish conditions.

MK2301

ANCHOR NUT
MINIATURE, ONE-LUG

MK2301