
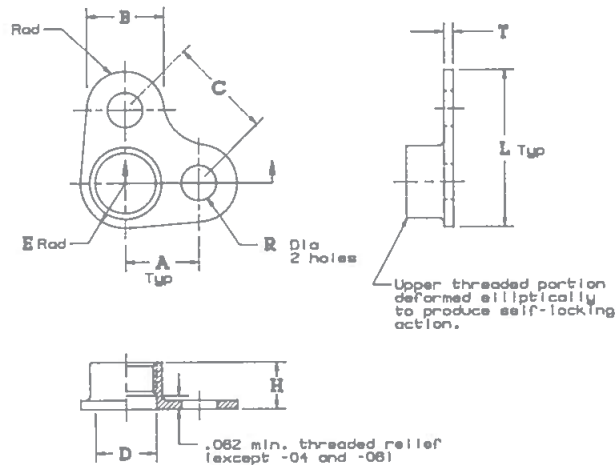




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005	B (REF)	C ±.002	D (MIN)	E (REF)	H (MAX)	L (MAX)	R ±.005 -.000	T (REF)	APPROX. WT. LBS./100
MK3000-04	.1120-40 UNJC-36	.203		.287	—		.130	.448		.025	.09
MK3000-06	.1380-32 UNJC-36	.218		.308	—	.125	.145	.457			.13
MK3000-08	.1640-32 UNJC-36	.234	.215	.331	.168		.215	.497	.098	.032	.17
MK3000-3	.1800-32 UNJF-36	.250		.354	.184	.158	.220	.528			.22
MK3000-4	.2500-28 UNJF-36	.281		.398	.254	.203	.281	.803		.040	.37
MK3000-5	.3125-24 UNJF-36	.312	.270	.441	.317	.250	.328	.707	.130	.050	.63

MATERIAL: Carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. QQ-P-416, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Examples: MK3000-3BC.
(Refer to engineering data section for "BC" details).

APPLICATION: For use where design requires full strength miniature adaptations of the standard corner anchor nut.
Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements.
The anchor nuts on this page are interchangeable with MS21073 and NAS898 in the various materials and finish conditions as applicable.

MK3000

ANCHOR NUT
MINIATURE, CORNER

MK3000