
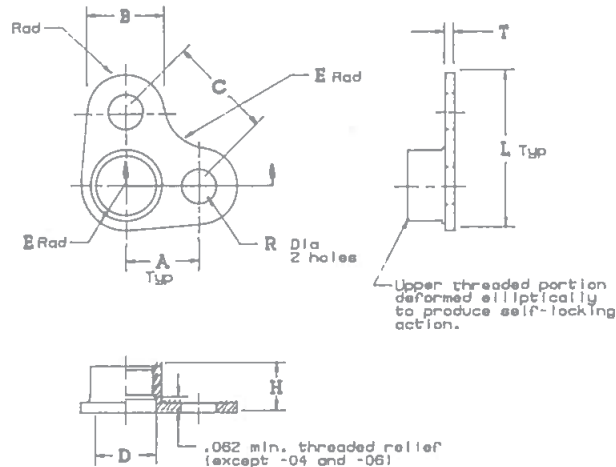




PART NUMBERS	THREAD (MIL-S-8878)	A* ±.005	B (REF)	C ±.002 (MIN)	D (REF)	E (MAX)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	APPROX. WT. LBS./100
MK3001-04	.1120-40 UNJC-3B	.203		.287	—	.130	.448			.025	.09
MK3001-06	.1380-32 UNJC-3B	.218		.308	—	.125	.457				.13
MK3001-08	.1640-32 UNJC-3B	.234	.215	.331	.168	.215	.497	.098		.032	.17
MK3001-3	.1900-32 UNJF-3B	.250		.354	.184	.156	.220	.526			.22
MK3001-4	.2500-28 UNJF-3B	.281		.388	.254	.203	.281	.803		.040	.37
MK3001-5	.3125-24 UNJF-3B	.312	.270	.441	.317	.250	.328	.707	.130	.050	.63

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Examples: MK3001-3P.
(Refer to engineering data section for "P" details).

APPLICATION: For use where design requires full strength miniature adaptations of the standard corner anchor nut. Specifically designed for use with MIL-S-8878 and MIL-S-7742 external threaded elements. MK3001 is used in areas requiring non-magnetic material or corrosion-resistant steel. The anchor nuts on this page are interchangeable with MS21074 and NAS688 in the various materials and finish conditions as applicable.

MK3001

**ANCHOR NUT
MINIATURE, CORNER**

MK3001