
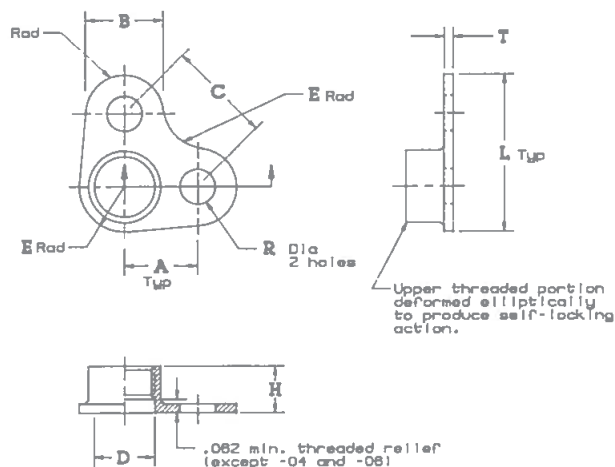




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005	B (REF)	C ±.002	D (MIN)	E (REF)	H (MAX)	L (MAX)	R ±.005 -.000	T (REF)	APPROX WT. LBS/100
MK3300-04	.1120-40 UNJC-3B	.148	.150	.210	--	.094	.130	.331	.088	.025	.05
MK3300-06	.1380-32 UNJC-3B	.172	.150	.243	--	.117	.145	.378	.088	.032	.08
MK3300-5	.3125-24 UNJF-3B	.358	.250	.508	.317	.253	.328	.757	.130	.050	.85

MATERIAL: Carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. QQ-P-418, Type II plating. Kaylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Examples: MK3300-3BC.
(Refer to engineering data section for "BC" details).

APPLICATION: For use where design requires full strength miniature adaptations of the standard corner anchor nut.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.
The anchor nuts on this page are interchangeable with MS21073 and NAS888 in the various materials and finish conditions as applicable.

MK3300

**ANCHOR NUT
MINIATURE, CORNER**

MK3300