
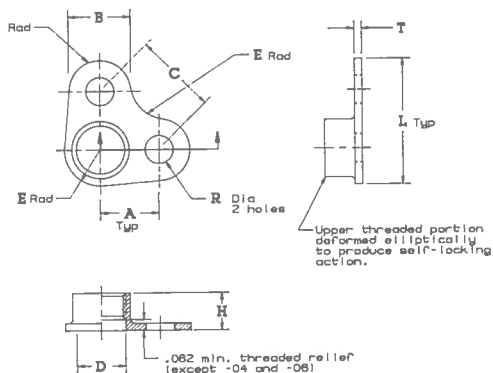




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005	B (REF) ±.002	C (MIN)	D (REF)	E (MAX)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	APPROX. WT. LBS/100
MK3301-04	.1120-40 UNJC-36	.148	.150	.210	--	.094	.130	.331	.068	.025	.05
MK3301-06	.1380-32 UNJC-36	.172		.243	--	.117	.145	.379		.032	.08
MK3301-5	.3125-24 UNJF-36	.358	.250	.508	.317	.253	.328	.757	.130	.050	.85

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Examples: MK3301-3P.
(Refer to engineering data section for "P" details).

APPLICATION: For use where design requires full strength miniature adaptations of the standard corner anchor nut.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.
MK3301 is used in areas requiring non-magnetic material or corrosion-resistant steel.
The anchor nuts on this page are interchangeable with MS21074 and NAS898 in the various materials and finish conditions as applicable.

MK3301

ANCHOR NUT
MINIATURE, CORNER

MK3301