
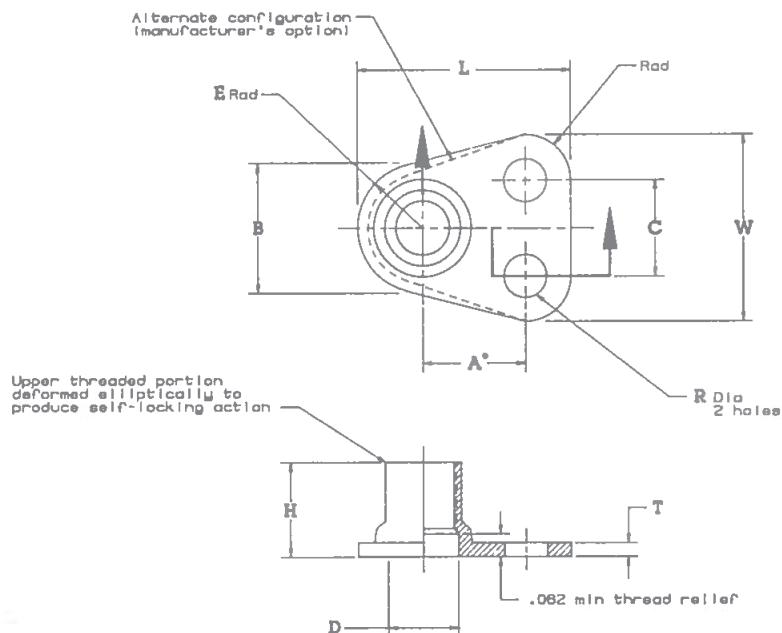




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005	B (MAX)	C ±.002 (MIN)	D (REF)	E (MAX)	H (MAX)	L (MAX)	R +.005 (REF) -.000	T (MAX)	W (MAX)	APPROX. WT. LBS/100
MK4000-08	.1840-32 UNJC-3B	.234	.297		.168	.125	.215	.488				.17
MK4000-3	.1900-32 UNJF-3B	.250	.328	.219	.184	.156	.220	.521	.098		.431	.21
MK4000-4	.2500-28 UNJF-3B	.281	.414		.254	.203	.281	.591		.040		.37
MK4000-5	.3125-24 UNJF-3B	.312	.525	.250	.317	.250	.328	.707	.130	.050	.525	.85

*The center of the tapped hole shall not deviate from the longitudinal center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: Carbon steel, heat treated.

FINISH: Cadmium plated per Fed. Spec. QQ-P-418, Type II plating.
Kagylube molybdenum disulfide dry lubricant coated after plating.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "BC" for bottom C'sunk rivet holes. Examples: MK4000-3BC.
(Refer to engineering data section for "BC" details).

APPLICATION: For use when design requires short one-lug, full strength, miniature anchor nuts designed to withstand maximum "push-out" forces.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements.
The anchor nuts on this page are interchangeable with MS21086 and NAS1087 in the various materials and finish conditions as applicable.

MK40000 ANCHOR NUT MINIATURE SHORT LUG MK40000