
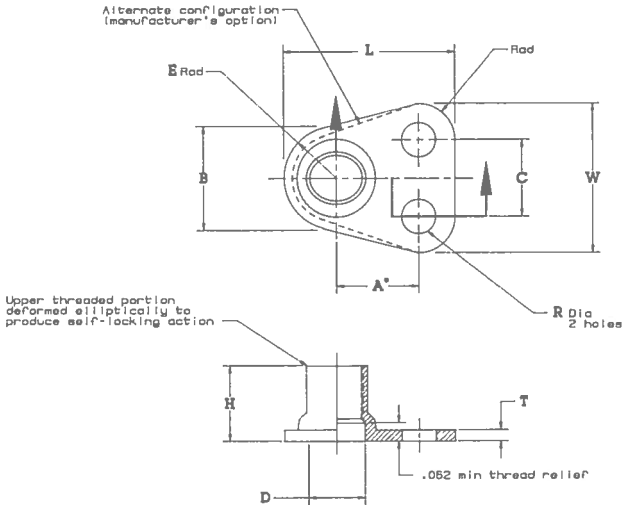




PART NUMBERS	THREAD (MIL-S-8879)	A* ±.005 (MAX)	B ±.002 (MAX)	C ±.002 (MIN)	D (REF)	E (MAX)	H (MAX)	L (MAX)	R +.005 -.000	T (REF)	W (MAX)	APPROX. WT. LBS/100
MK4001-08	.1640-32 UNJC-3B	.234	.297		.188	.125	.215	.486		.032		.17
MK4001-3	.1800-32 UNJF-3B	.250	.328	.219	.194	.158	.220	.521	.088		.431	.21
MK4001-4	.2500-28 UNJF-3B	.281	.414		.254	.203	.281	.591		.040		.37
MK4001-5	.3125-24 UNJF-3B	.312	.525	.250	.317	.250	.328	.707	.130	.050	.525	.65

*The center of the tapped hole shall not deviate from the longitudinal center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
Use part number MK4031 for silver plated per AMS2410. Temperature range 800°F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Example: MK4001-3P.
(Refer to engineering data section for "P" details).

APPLICATION: For use when design requires short one-lug, full strength, miniature anchor nuts designed to withstand maximum "push-out" forces.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements. MK4001 AND MK4031 is use in areas requiring non-magnetic materials or corrosion-resistant steel.
The anchor nuts on this page are interchangeable with MS21087 and NAS1087 in the various materials and finish conditions as applicable.