
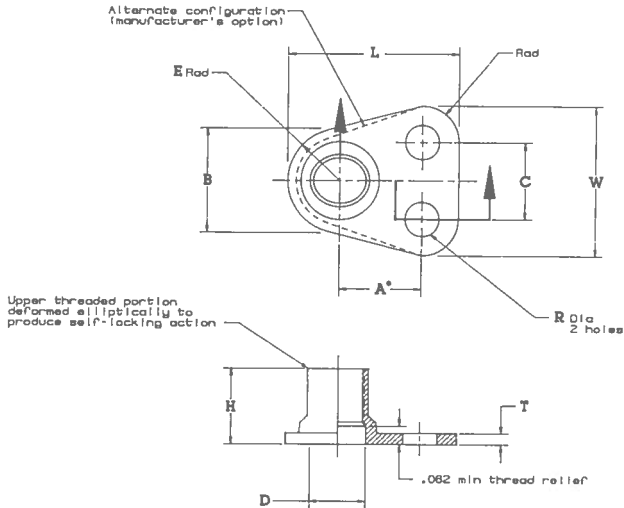




PART NUMBERS	THREAD (MIL-S-8879)	A'	B	C	D	E	H	L	R	T	W	APPROX WT. LBS/100
		±.005 (MAX)	±.002 (MIN)	(REF)	(MAX)	(MAX)	±.005 -.000	(REF)	(MAX)			
MK4301-5	.3125-24 UNF-3B	.359	.505	.269	.317	.257	.328	.747	.130	.050	.537	.64

*The center of the tapped hole shall not deviate from the longitudinal center of the plate nut, as determined by the rivet holes, by more than .005.

MATERIAL: A286 corrosion-resistant steel.

FINISH: Kaylube molybdenum disulfide dry lubricant coated.
Use part number MK4331 for silver plated per AMS2410. Temperature range 900°F.

PROCUREMENT SPEC: MIL-N-25027.

TEMPERATURE RANGE: 450°F.

VARIATIONS: Add "P" for bottom projection weld ribs. Examples: MK4331-3P.
(Refer to engineering data section for "P" details).

APPLICATION: For use when design requires short one-lug, full strength, miniature anchor nuts designed to withstand maximum "push-out" forces.
Specifically designed for use with MIL-S-8879 and MIL-S-7742 external threaded elements. MK4301 AND MK4331 is use in areas requiring non-magnetic materials or corrosion-resistant steel.
The anchor nuts on this page are interchangeable with MS21087 and NAS1087 in the various materials and finish conditions as applicable.

MK4301

ANCHOR NUT
MINIATURE, SHORT LUG

MK4301