


ITR FASTENER® TECHNICAL SPECIFICATIONS

"K" Series (Small Head)

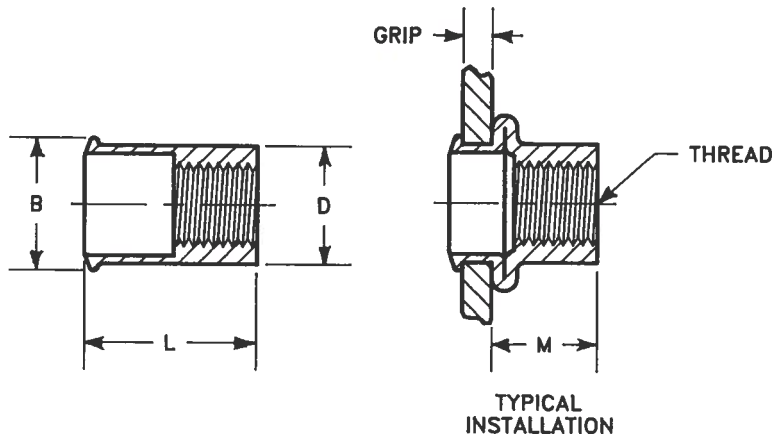

PART NUMBER	THREAD SIZE	MATERIAL THICKNESS (Grip Range)	DIMENSIONS			INSTALL HOLE SIZE	INSTALL DRILL SIZE	M REF.
			L (Max)	B (Min)	D (Max)			
ITR6-80SK	#6-32UNC-2B	.020-.080	.450	.295	.265	.266-.272	H	.265
ITR6-130SK	#6-32UNC-2B	.080-.130	.500	.295	.265	.266-.272	H	.265
ITR8-80SK	#8-32UNC-2B	.020-.080	.450	.295	.265	.266-.272	H	.265
ITR8-130SK	#8-32UNC-2B	.080-.130	.500	.295	.265	.266-.272	H	.265
ITR10-130SK	#10-32UNC-2B	.020-.130	.505	.326	.296	.297-.303	19/64	.300
ITR10-225SK	#10-32UNC-2B	.130-.225	.615	.326	.296	.297-.303	19/64	.300
ITR25-165SK	1/4-20UNC-2B	.027-.165	.610	.420	.390	.391-.397	25/64	.340
ITR25-260SK	1/4-20UNC-2B	.165-.260	.710	.420	.390	.391-.397	25/64	.340
ITR31-165SK	5/16-18UNC-2B	.027-.165	.720	.560	.530	.531-.538	17/32	.420
ITR31-312SK	5/16-18UNC-2B	.165-.312	.835	.560	.530	.531-.538	17/32	.420
ITR37-165SK	3/8-16UNC-2B	.027-.165	.720	.560	.530	.531-.538	17/32	.420
ITR37-312SK	3/8-16UNC-2B	.165-.312	.835	.560	.530	.531-.538	17/32	.420
ITRM4-2.0SK	M4x0.7-6H	0.50-2.00	11.45	7.50	6.75	6.80-6.95	6.80	6.7
ITRM4-3.3SK	M4x0.7-6H	2.00-3.30	12.70	7.50	6.75	6.80-6.95	6.80	6.7
ITRM5-3.3SK	M5x0.8-6H	0.50-3.30	12.85	8.25	7.55	7.55-7.70	7.60	7.6
ITRM5-5.7SK	M5x0.8-6H	3.30-5.70	15.65	8.25	7.55	7.55-7.70	7.60	7.6
ITRM6-4.2SK	M6x1.0-6H	0.70-4.20	15.50	10.65	9.90	9.95-10.10	10.00	8.6
ITRM6-6.6SK	M6x1.06H	4.20-6.60	18.05	10.65	9.90	9.95-10.10	10.00	8.6
ITRM8-4.2SK	M8x1.25-6H	.070-4.20	18.30	14.20	13.50	13.50-13.65	13.50	10.7
ITRM8-7.9SK	M8x1.25-6H	4.20-7.90	21.20	14.20	13.50	13.50-13.65	13.50	10.7
ITRM10-4.2SK	M10x1.50-6H	.070-4.20	18.30	14.20	13.50	13.50-13.65	13.50	10.7
ITRM10-7.9SK	M10x1.50-6H	4.20-7.90	21.20	14.20	13.50	13.50-13.65	13.50	10.7

Fastener Specifications:

Material: Steel C-1008, C-1010
 Finish: Zinc Plate per ASTM B633
 FE / ZN 8 TYPE II
 (Cad Plate Available)

Part Number Explanation:

Example: ITR6-80SK

I **T** **R** **6** **80** **S** **K**
 ITR Fastener® Thread Size Grip Range Steel "K" Series