

# Power-operated tools for RIVNUT®/PLUSNUT® fasteners


## C-300R and C-300P pneumatic header

**C-300R** Range: #4 thru 5/16 RIVNUT  
(3/8 aluminum)

Metric: M3 thru M8 RIVNUT  
(M10 aluminum)

**C-300P** Range: #4 thru #10 PLUSNUT

Metric: M3 thru M5 PLUSNUT

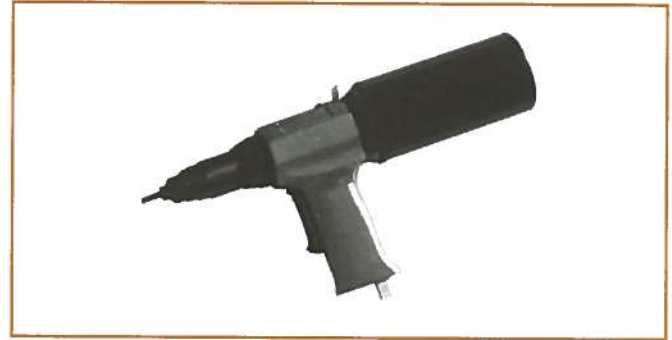

### Operating range

C-300R (RIVNUTS) Material	#4	#6	#8	#10	1/4	5/16	3/8	M3	M4	M5	M6	M8	M10
Aluminum													
Brass & Steel													
Stainless Steel													

Recommended

C-300P (PLUSNUTS) Material	#4	#6	#8	#10	M3	M4	M5
Aluminum							
Steel							
Brass & Stainless Steel							

Recommended

### Parts required to convert tool to other thread sizes

#### Unified Thread System

Thread Size	Pull-Up Stud	Anvil	
		RIVNUTS	PLUSNUTS
4-40	LP2603-440	LP2602-440	LP2602-440
6-32	LP2603-632	LP2602-632	LP2602-632
8-32	LP2603-832	LP2602-832	LP2602-832
10-32	LP2603-1032	LP2602-1032	LP2602-1032
1/4-20	LP2603-1/4" 20	LP2602-1/4" 20	LP2602-1/4" 20

#### Metric Thread System

Thread Size	Pull-Up Stud	Anvil	
		RIVNUTS	PLUSNUTS
M3	LP2603-M3	LP2602-M3	LP2602-M3
M4	LP2603-M4	LP2602-M4	LP2602-M4
M5	LP2603-M5	LP2602-M5	LP2602-M5
M6	LP2603-M6	LP2602-M6	LP2602-M6